

DIRECT ACTING OUNCES PRESSURE REDUCING PILOT

APPLICATIONS:





Used to produce a proportional pneumatic output signal when the monitored pressure rises above the set pressure. The Pneumatic signal source is isolated from the monitored pressure.


SUPPLY PRESSURE:

30 psig. Max.

PRESSURE RANGE:


.5 ounces to 2.5 psig
Optional springs provide maximum setpoint of 5 psig or 20 psig

-  Pilot Assembly
-  Output Pressure
-  Controlled Vacuum
-  Supply Pressure

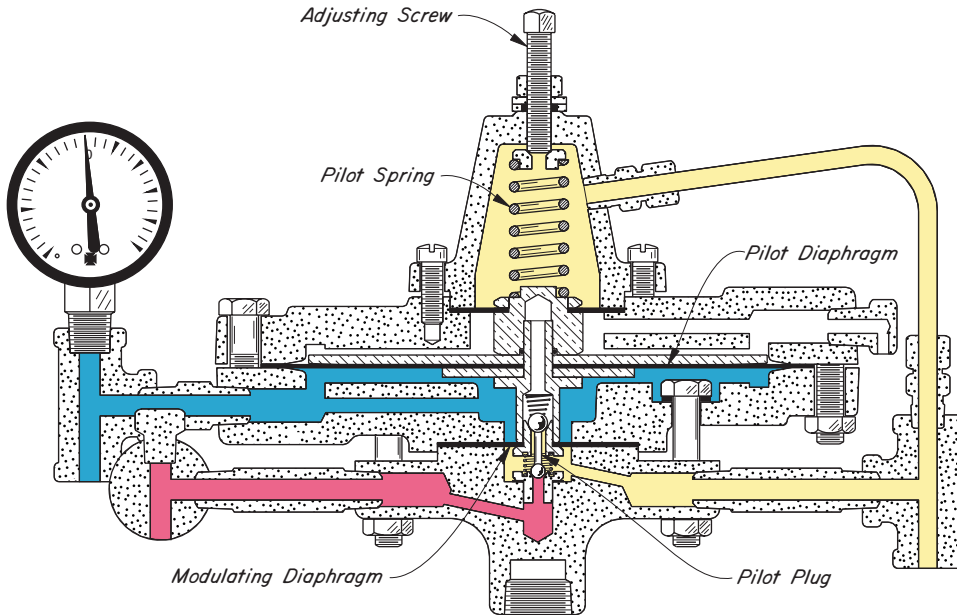

DIRECT ACTING OUNCES PRESSURE REDUCING PILOT

0.5 PG OPRA DA
CAST IRON
2.5, 5, 20 lbs. W.P.

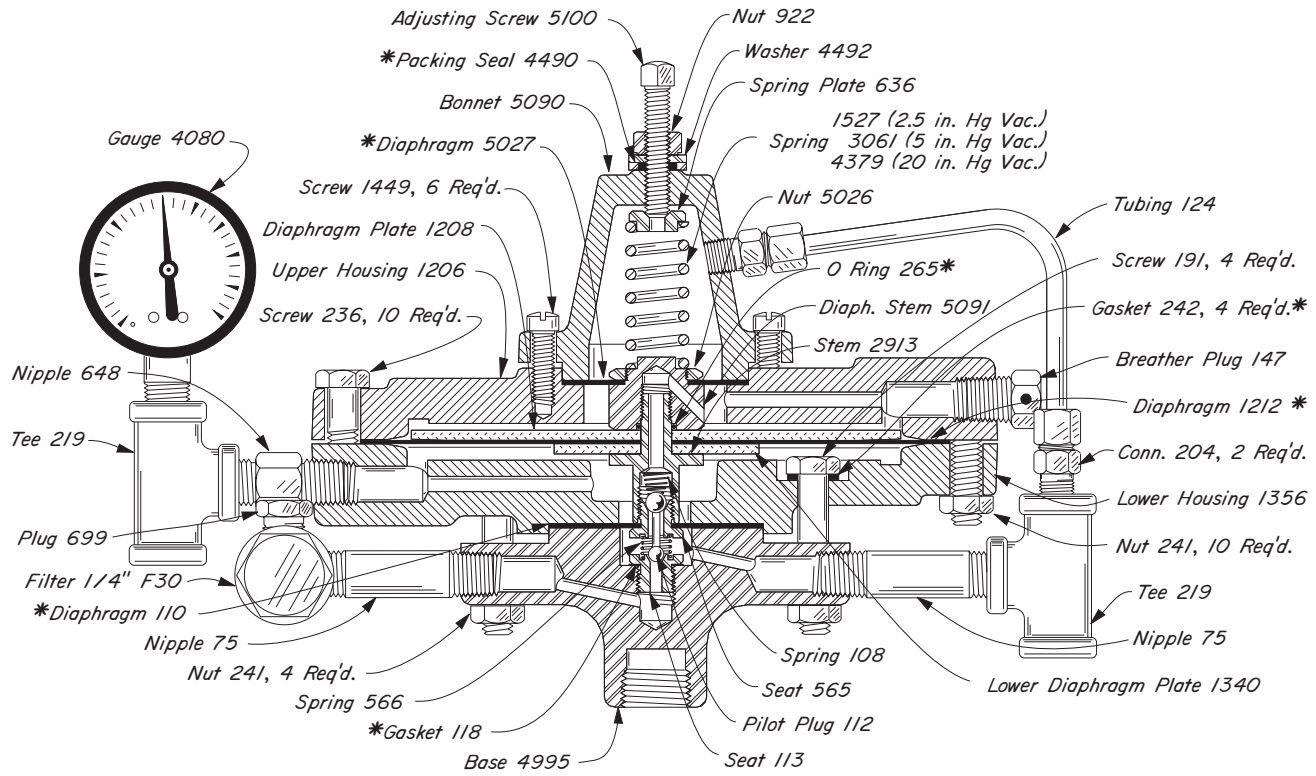

PILOTS AVAILABLE:

CAT. NO. PILOTS	DES. PRESS.	OPER. PRESS.
YIB-2.5	0.2 PG OPRA DA	175 2.5 in. Hg Vac
YIB-5	0.5 PG OPRA DA	175 5 in. Hg Vac
YIB-20	2 PG OPRA DA	175 20 in. Hg Vac

*These are recommended spare parts and are stocked as repair kits. To order repair kit, specify: "0.5 PG OPRA-DA Repair Kit, RWN"